30004 - Flamcovent Smart 1 1/4

Product Data Sheet 2026/11/22

More compact, lighter, cleaner and more efficient



For total elimination of air from heating and cooling installations.
Air separators increase comfort and improve the yield. Air separators also offer benefits in the event of application in old systems or when an open system is converted to a closed system.

- Increases comfort and yield.
- The removal of air from the system water extends the service life of pumps, control equipment and other system accessories.

The Flamcovent Smart air separators remove even the smallest microbubbles from the system water. They are virtually maintenance-free and the flow resistance is negligibly low.

Advantages


- 60% better performance compared to conventional separators.
- Flow velocity up to 3 m/s.
- Can be used with all kinds of pipework.
- Compact dimensions, light weight.
- Extremely low flow resistance and low loss of energy.
- Consistent performance throughout its service life.


Technical Specifications


- Materials: brass and high-quality plastic.
- Minimum/Maximum operating temperature: -10 °C / 120 °C.
- Minimum/Maximum system pressure: 0,2 / 10 bar.
- Minimum/Maximum operating pressure: 0,2 / 6 bar.
- Suitable for addition of glycol-based anti-freeze up to 50%.
- Suitable for addition of ethanol-based anti-freeze up to 30%.

Description		Flamcovent Smart G1¼"F
Order Code		30004
GTIN		8712874300040
Model		Flamcovent Smart
Connection (E)		G 1 1/4 " F
Dimensions	A [mm]	82
	C [mm]	165
	D [mm]	110
	K [mm]	96
	L [mm]	139
	M [mm]	45
	H/H1 [mm]	194
	H2 [mm]	184
	Ø N [mm]	75
Weight [kg]		1.27


© 2026 Aalberts hfc B.V. All rights reserved. We reserve the right to change designs and technical specifications of our products.

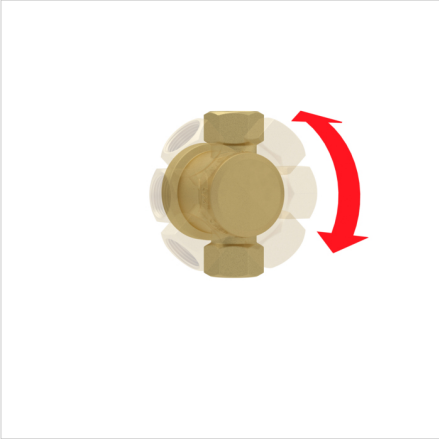


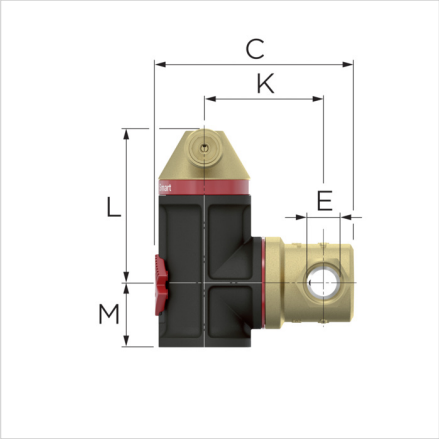


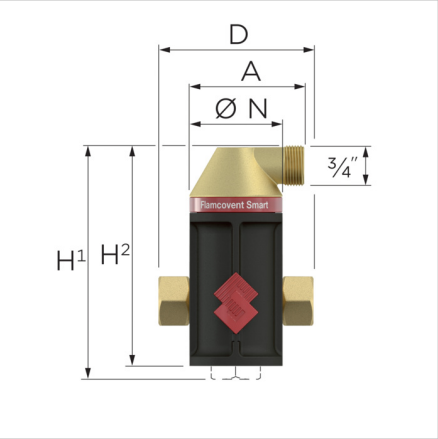



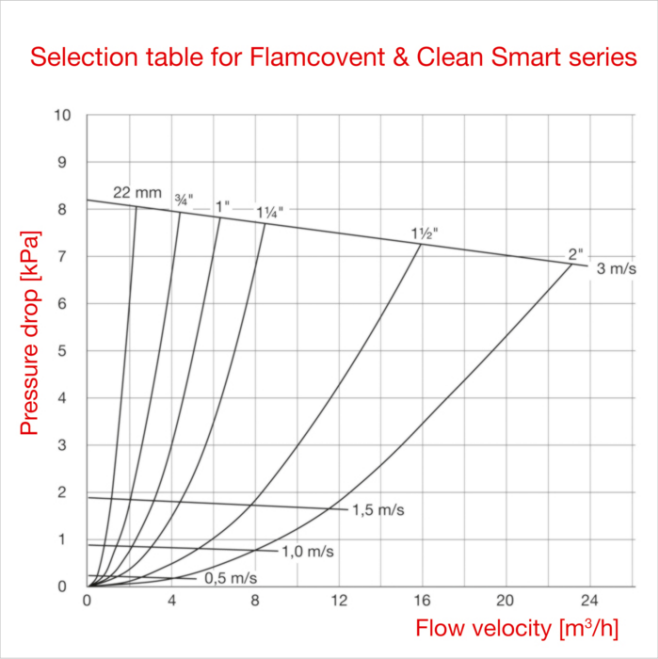





© 2026 Aalberts hfc B.V. All rights reserved. We reserve the right to change designs and technical specifications of our products.

Classification General Data

Etim Group	Filters/separators
Etim Class	Air-/dirt separator
Product Name	None
Brand	Flamco
Product Type	Smart Air & Dirt (=< 2")
Order Code	30004
GTIN	8712874300040

Attributes

Separator type	Air
Model	Horizontal/vertical
Material of connection	Brass
Material quality connection	Other
Housing material	Other
Housing material quality	Other
Variable flow direction	No
Suitable for heating	Yes
Suitable for cooling	Yes
Suitable for solar	No
Nominal diameter	1 1/4 inch (32)
Outer pipe diameter	42.4 mm
Connection	Internal thread cylindrical BSPP-G (ISO 228-1)
Construction length	110 mm
Article compression class	PN 10
Surface protection	Untreated
Whirl operating principle	No
Negative pressure operating principle	No
Magnet operating principle	No
Thrust operating principle	Yes
Partial flow principle	Yes
Principle full flow with settling	No
Cleaning possible during operation	No
Magnet location	None
Flow-through capacity	0 - 11.36 m^3/h
Suitable for open system	No
Suitable for closed system	Yes
With drain valve	No
With dismountable filter	No
Filter volume	0 l
Filter mesh density	0 mm
Backwash filter	No
Min. pressure for back flush	0 bar
With automatic de-aerator	Yes
With couplers	No
Inlet/outlet offset distance	0 mm
Medium temperature (continuous)	-10 - 120 °C
Max. operating pressure	10 bar
With insulation	No
Heat conduction coefficient insulation material (λ)	0 W/(m.K)
Max. glycol mixture	50 %
Material	Plastic
Operating principle	Other
With blow-off valve	Yes
With integrated replenishment automat	No
Kvs value	33.3 m^3/h

© 2026 Aalberts hfc B.V. All rights reserved. We reserve the right to change designs and technical specifications of our products.

Find more information online:

Installation and operating instruction
Statement of Conformity
Flamcovent Smart ADSK
Flamcovent Smart ADSK Revit
Flamcovent Smart DWG
Flamcovent Smart STEP
Brochure
Specification Text
Packaging data
Whitepaper Propane heat pumps
Flamcovent & Clean Smart

Fort Blauwkapel 1
1358 DB, Almere - nl

T +31 (0)36 52 62 300
E info@aalberts-hfc.com
I flamco.aalberts-hfc.com

© 2026 Aalberts hfc B.V. All rights reserved. We reserve the right to change designs and technical specifications of our products.